

Wall Mounted Speaker 70V



Wall Mounted Speaker 70V


Wall Mounted Speaker 70V, (System 1) is a complete loudspeaker system consisting of a 20.32 cm/8 in O.D., dual cone loudspeaker with a 0.142 kg/5 oz magnet and a 5W, 25/70V transformer mounted on a square, screw mount, steel baffle with a square, steel, vandal resistant, surface mount enclosure with four (4) 8-32 threaded inserts, a single 1.27cm/0.5 in conduit entrance on the back and two (2) Wiremold knockouts. White powder coat finish.



Specifications

(6400-00134) System 1

Dimensions (h x w x d)	29.53 x 29.53 x 10.48 cm / 11.625 x 11.625 x 4.125 in
Weight	4.54 kg / 10 lbs
Loudspeaker	8C5PAX
Transformer	TBLU: 5W, 25/70V, with 5 taps (0.31W, 0.63W, 1.25W, 2.5W, 5.0W)
Baffle	BS8W
Backbox	SE1WVP with four (4) 8-32 threaded inserts
Finish	White powder coat
Average Sensitivity	92dB SPL, 1W/1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Maximum Output	15W @ 8 Ohms
Calculated Output	99dB SPL, 5W/1M
Magnet Type & Weight	BeFe Ceramic, 4.8 oz. Nominal
Frequency Response	65Hz - 17kHz EIA, 426A Standard
Nominal Coverage Angle	90° Included Angle, -6dB/2kHz, Half Space
Audio Connection	17.78cm / 7in color-coded pigtails, pre-cut
Intended Use	Indoor environment
Program Material	Signal tones, voice and music
Installation	Horizontal or vertical surface mount

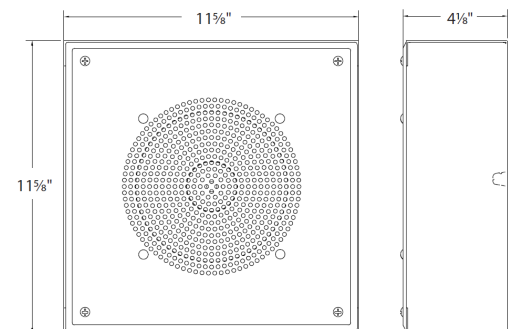

Learn more at boxlight.com